

FIG. 1A (PRIOR ART)

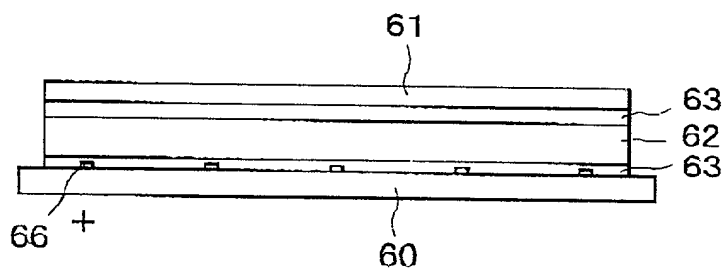


FIG. 1B (PRIOR ART)

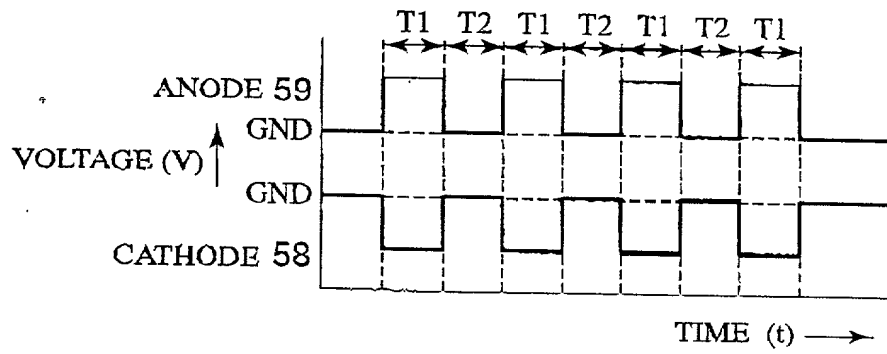


FIG.2 (PRIOR ART)

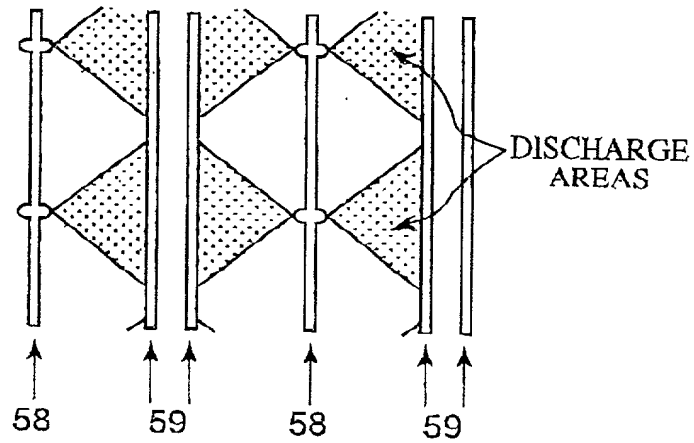


FIG.3 (PRIOR ART)

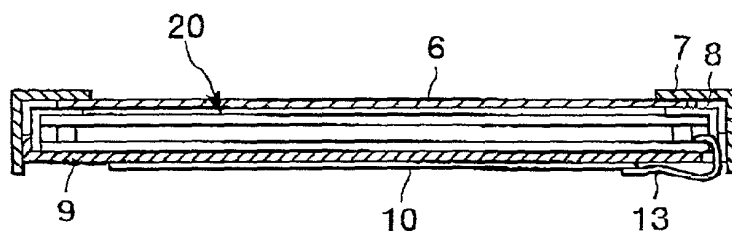


FIG. 4

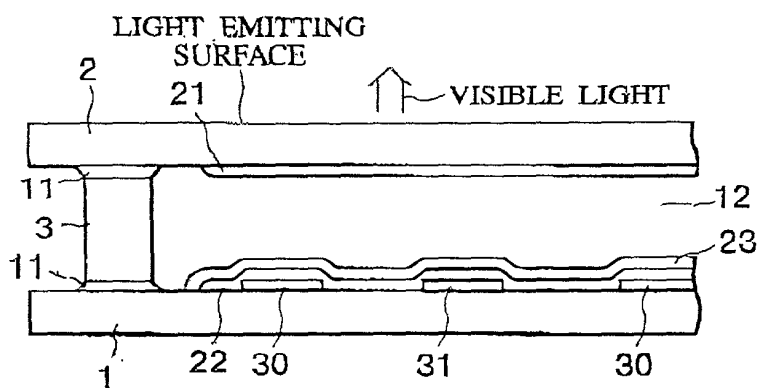


FIG. 5

202312095272001

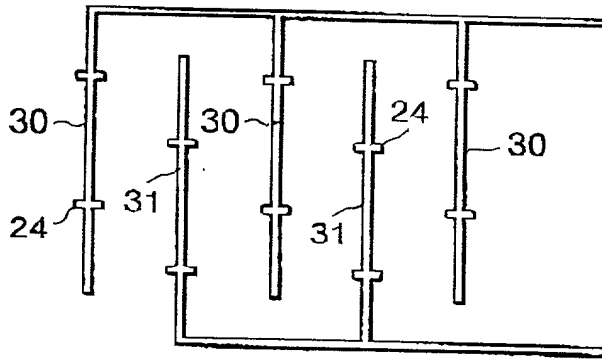


FIG.6

FIG.7A

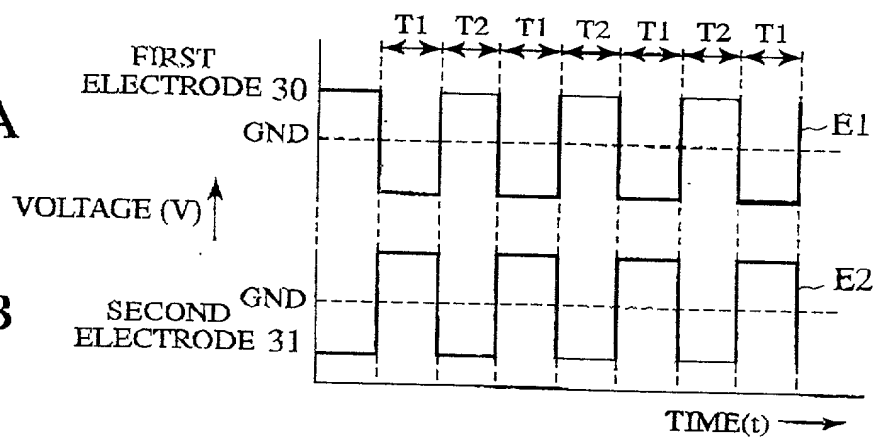


FIG.7B

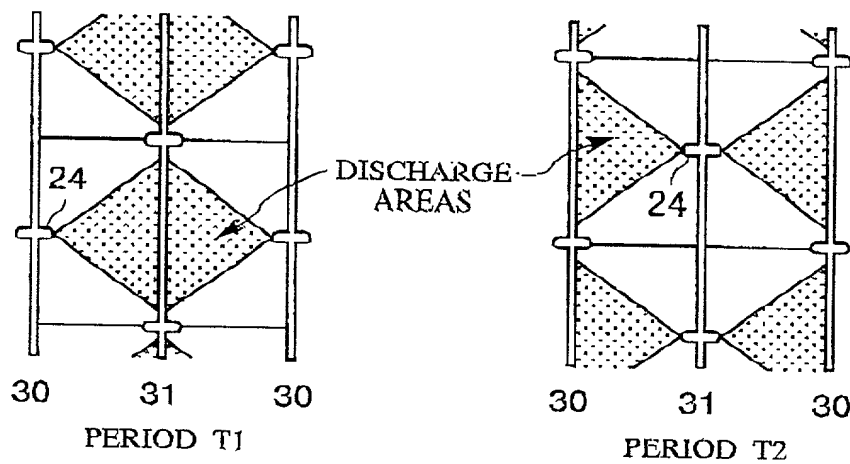


FIG. 8A

FIG. 8B

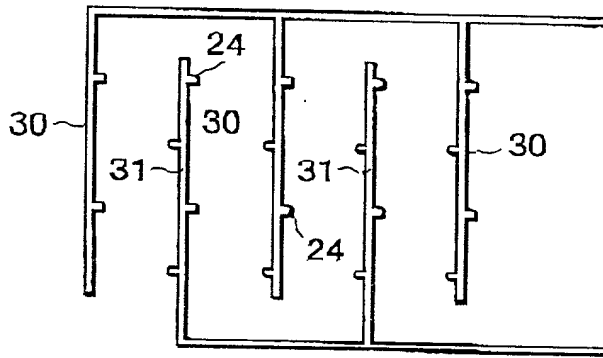


FIG. 9

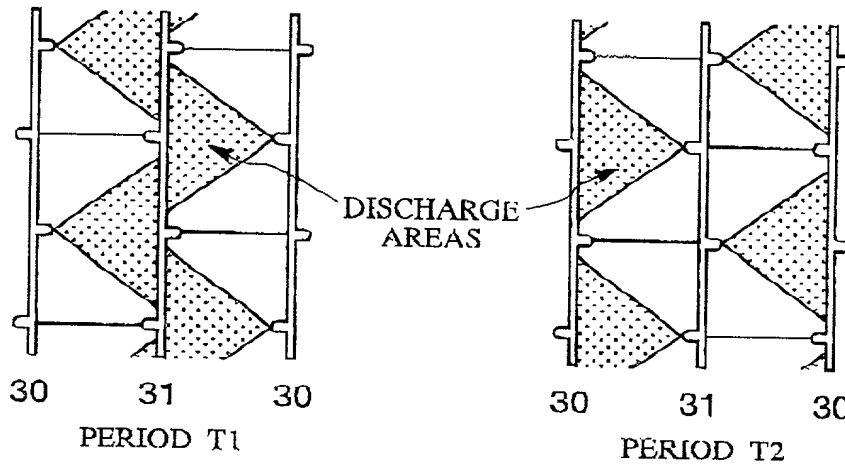


FIG. 10A

FIG. 10B

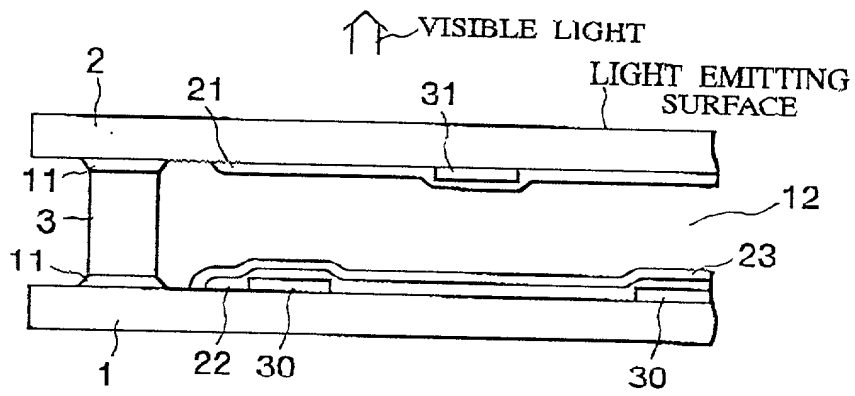


FIG.11

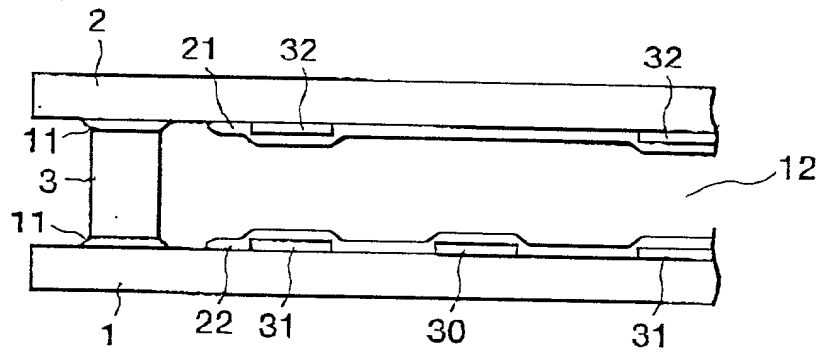


FIG. 12

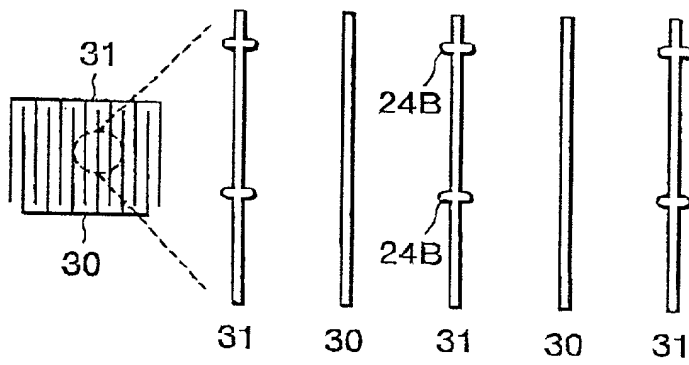


FIG. 12A

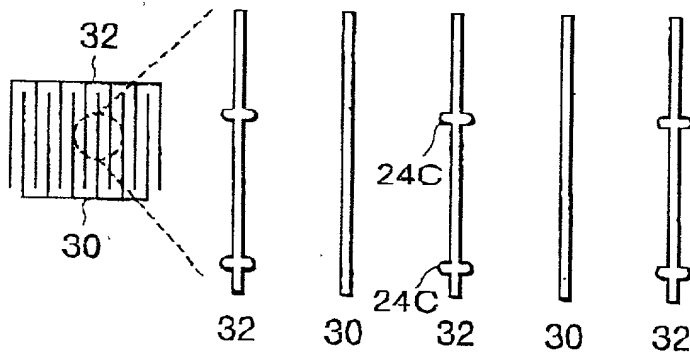


FIG. 12B



FIG. 13B

FIG.13C




FIG. 14A





FIG. 14B

10/14

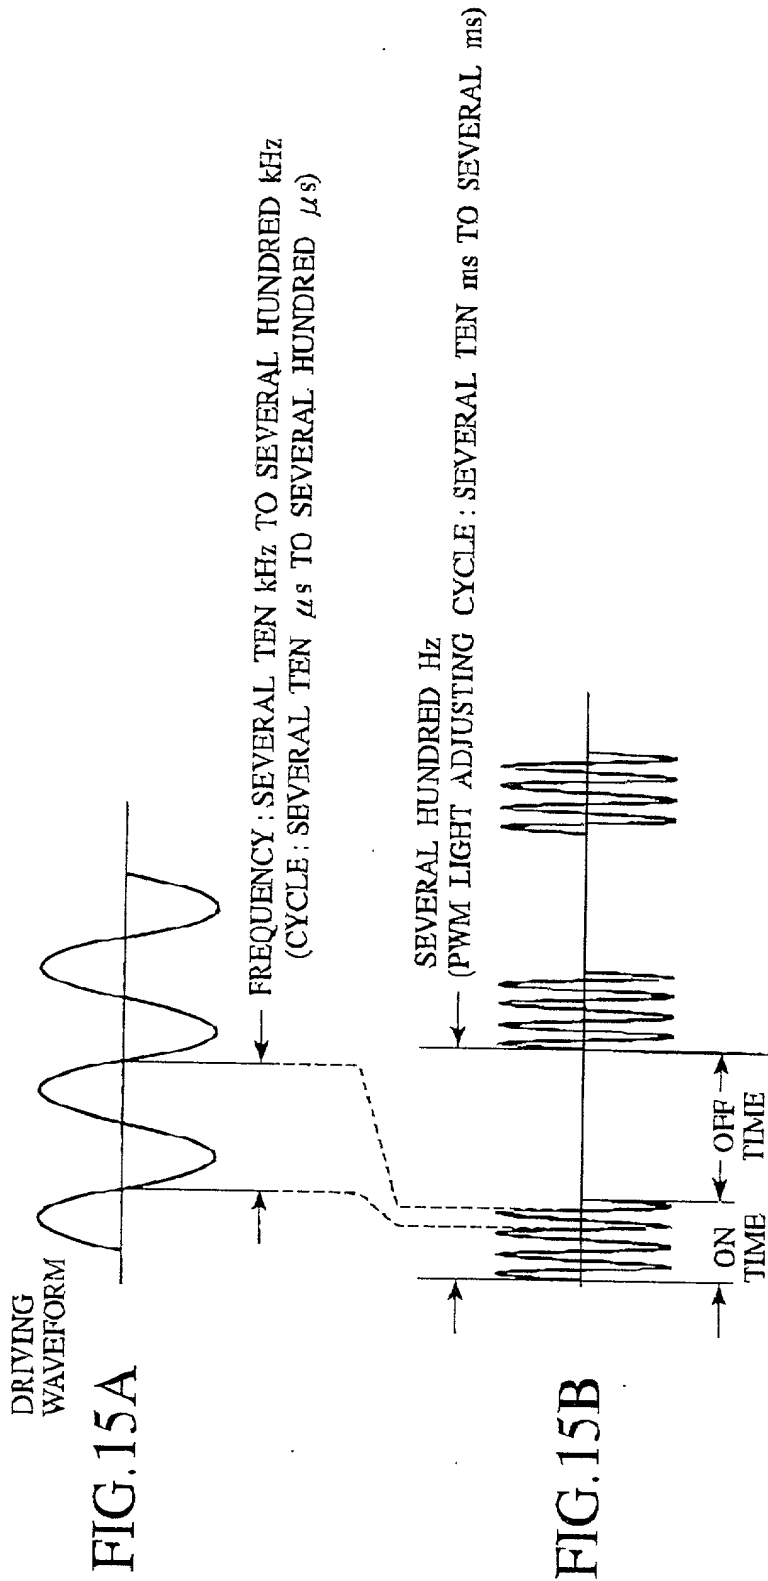

FOR EXAMPLE, 10% LIGHT ADJUSTING DEGREE MEANS
EQUATION "ON TIME / PWM LIGHT ADJUSTING CYCLE = 10%" IS SATISFIED

FIG. 16A
FIRST
ELECTRODE 30

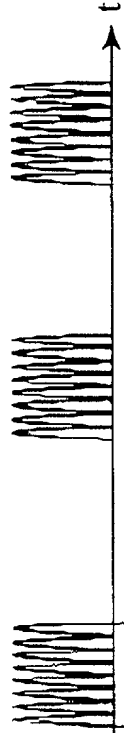


FIG. 16B
SECOND
ELECTRODE 31





FIG. 16C
THIRD
ELECTRODE 32



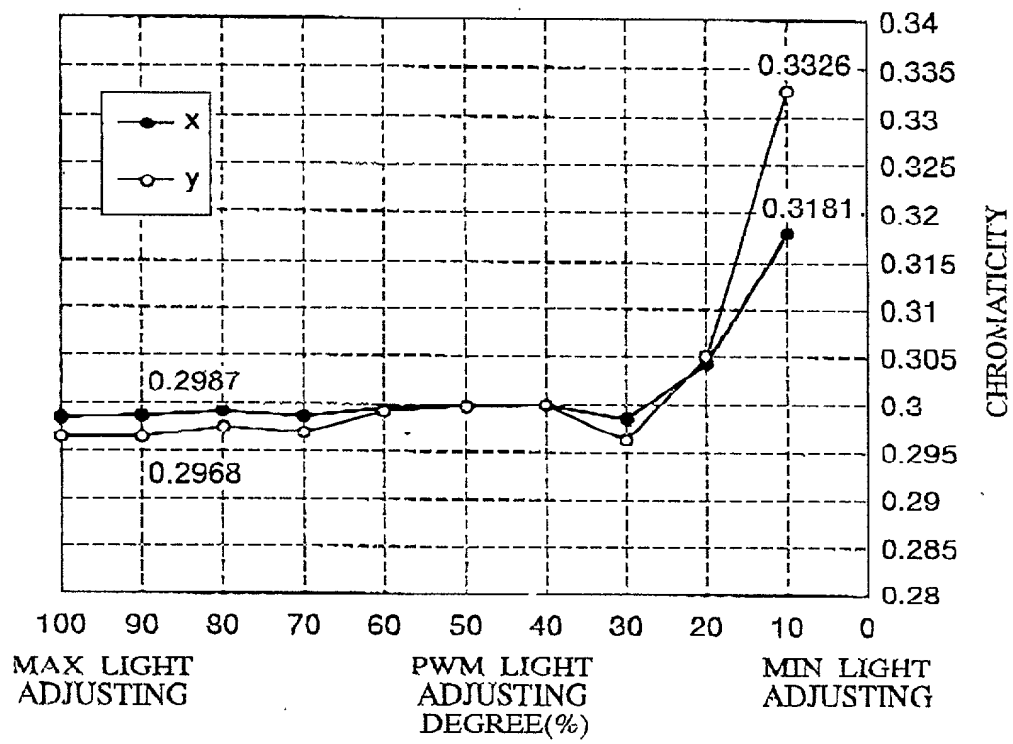


FIG.17




FIG. 18A



FIG. 18B




FIG. 18C




FIG. 18D




FIG. 18E

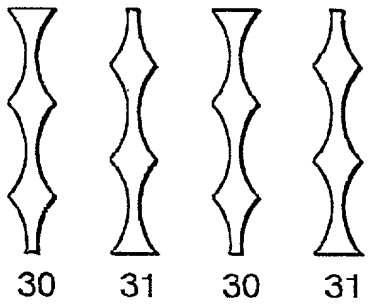


FIG. 19A

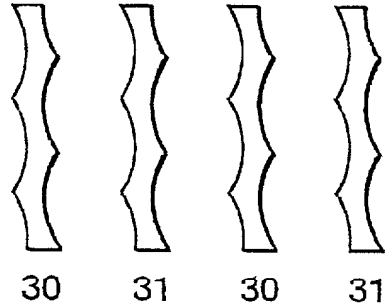


FIG. 19B

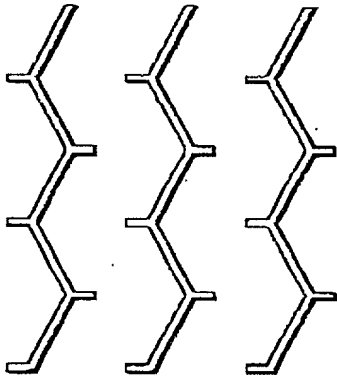


FIG. 19C

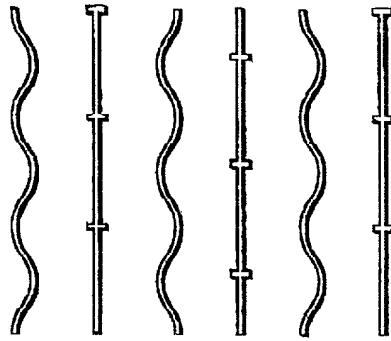


FIG. 19D